



## Installing Hex USB or AES/EBU modules



Above picture shows the default configuration of the Hex DAC. Both AES/EBU and USB covers are protected with adhesive tape to avoid accidental removal. Remove tape for Module being installed.



Push out the relevant cover



USB cover removed.



Length of spacer 7mm – M3 Hex screw.



Installing the USB Board.



When the board is in place and properly aligned, push on both sides until firmly in place.






In place.




USB connector should be in the middle.

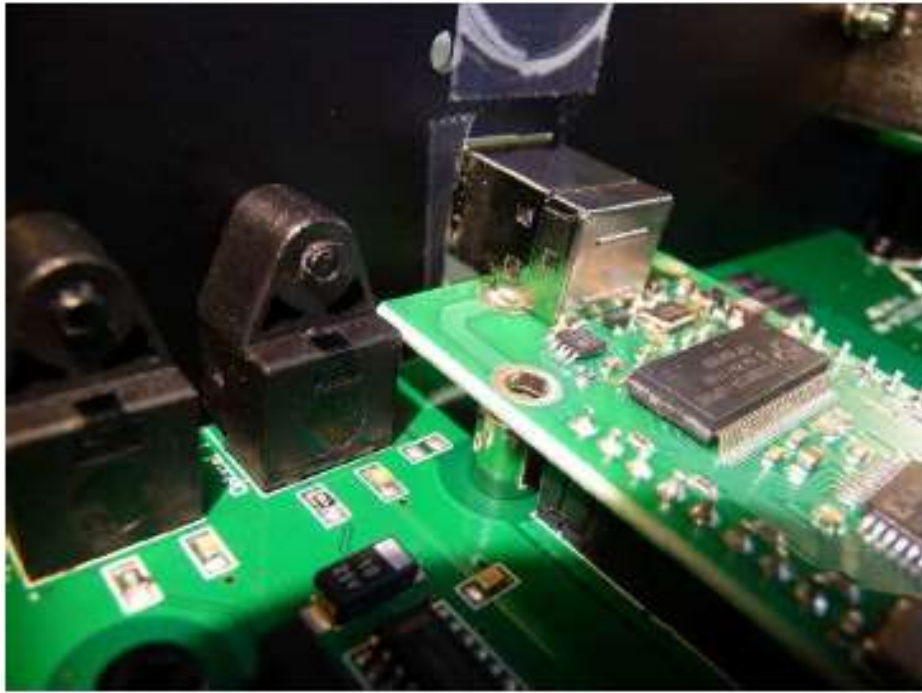

Lift the board a little to position the spacer.



Fit the screw and tighten it gently.

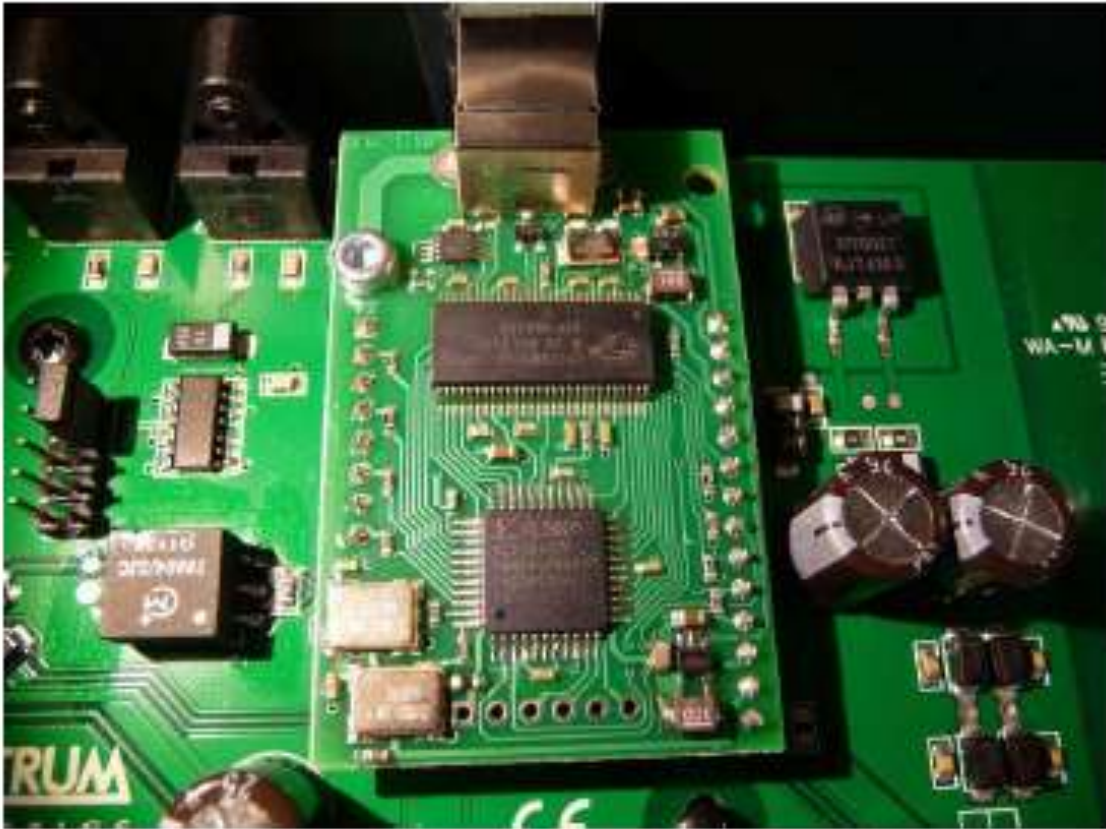

Finished.